
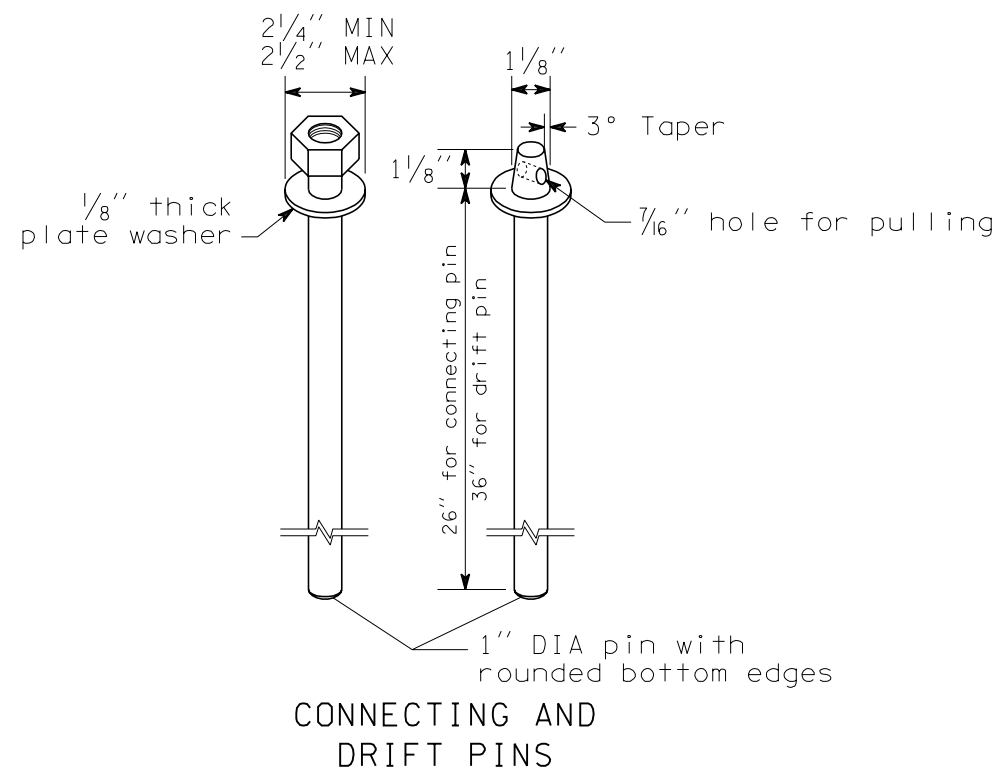


NOTES:

- Wire rope loops shall be 44" long, except for top loop of Terminal, which shall be 24" long.
- Wire seizing shall be eight wraps of 16 guage wire with ends twisted together, or equivalent fastening.

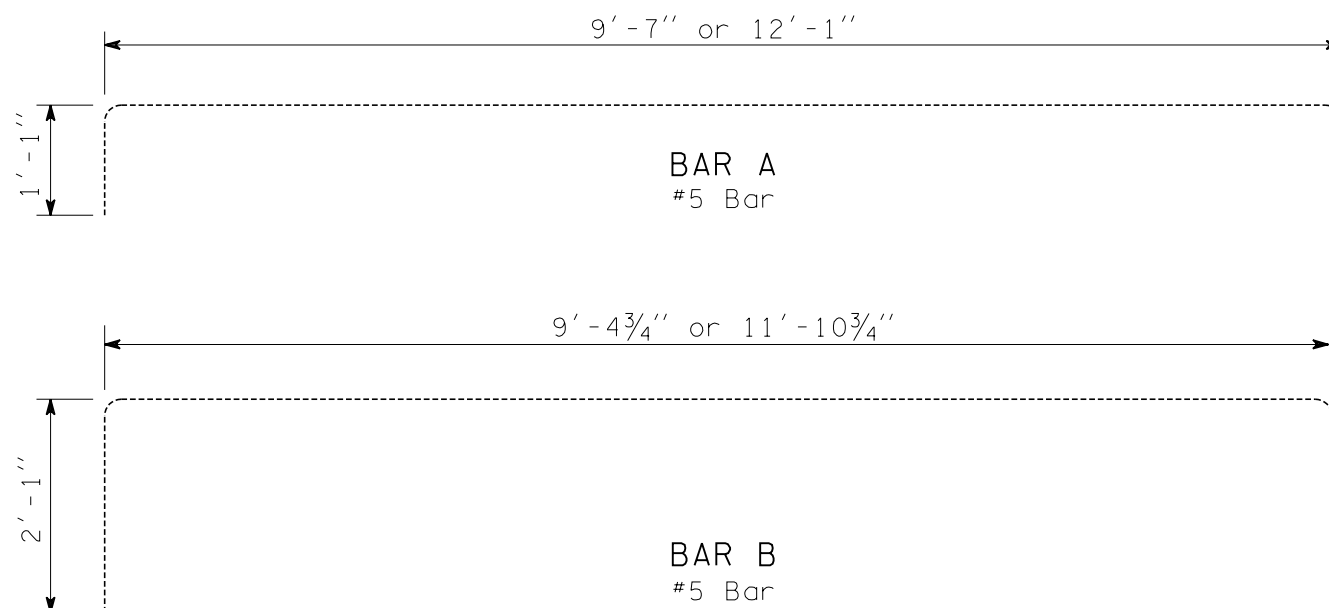

CONCRETE BARRIER
TYPE 2

STANDARD PLAN C-8

SHEET 2 OF 2 SHEETS

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

8/98	Change wire rope loop seizing, added notes 1 and 1	RAB
DATE	REVISION	BY

APPROVED FOR PUBLICATION	
Clifford E. Mansfield	8/10/98
DEPUTY STATE DESIGN ENGINEER	DATE
WASHINGTON STATE DEPARTMENT OF TRANSPORTATION OLYMPIA, WASHINGTON	